


BERTH 519

MAX DRAUGHT (MW):	12.50 M	MAX/MIN MANIFOLD HEIGHT	
MAX LOA:	280 M	ABOVE WATERLINE (MW)	
MAX BREADTH:	N/A	Hardarms 1-6:	15.6 / 2.0 M
UKC:	0.5 M	Hardarm 7:	17.6 / 2.0 M
MIN PARALLELL BODY:	26 M	QUAY DECK HEIGHT (MW):	3.5 M
MIN FREEBOARD (MW):	N/A	MAX BCM/SCM:	N/A
		MAX DISPLACEMENT:	N/A
		MAX SPEED:	N/A

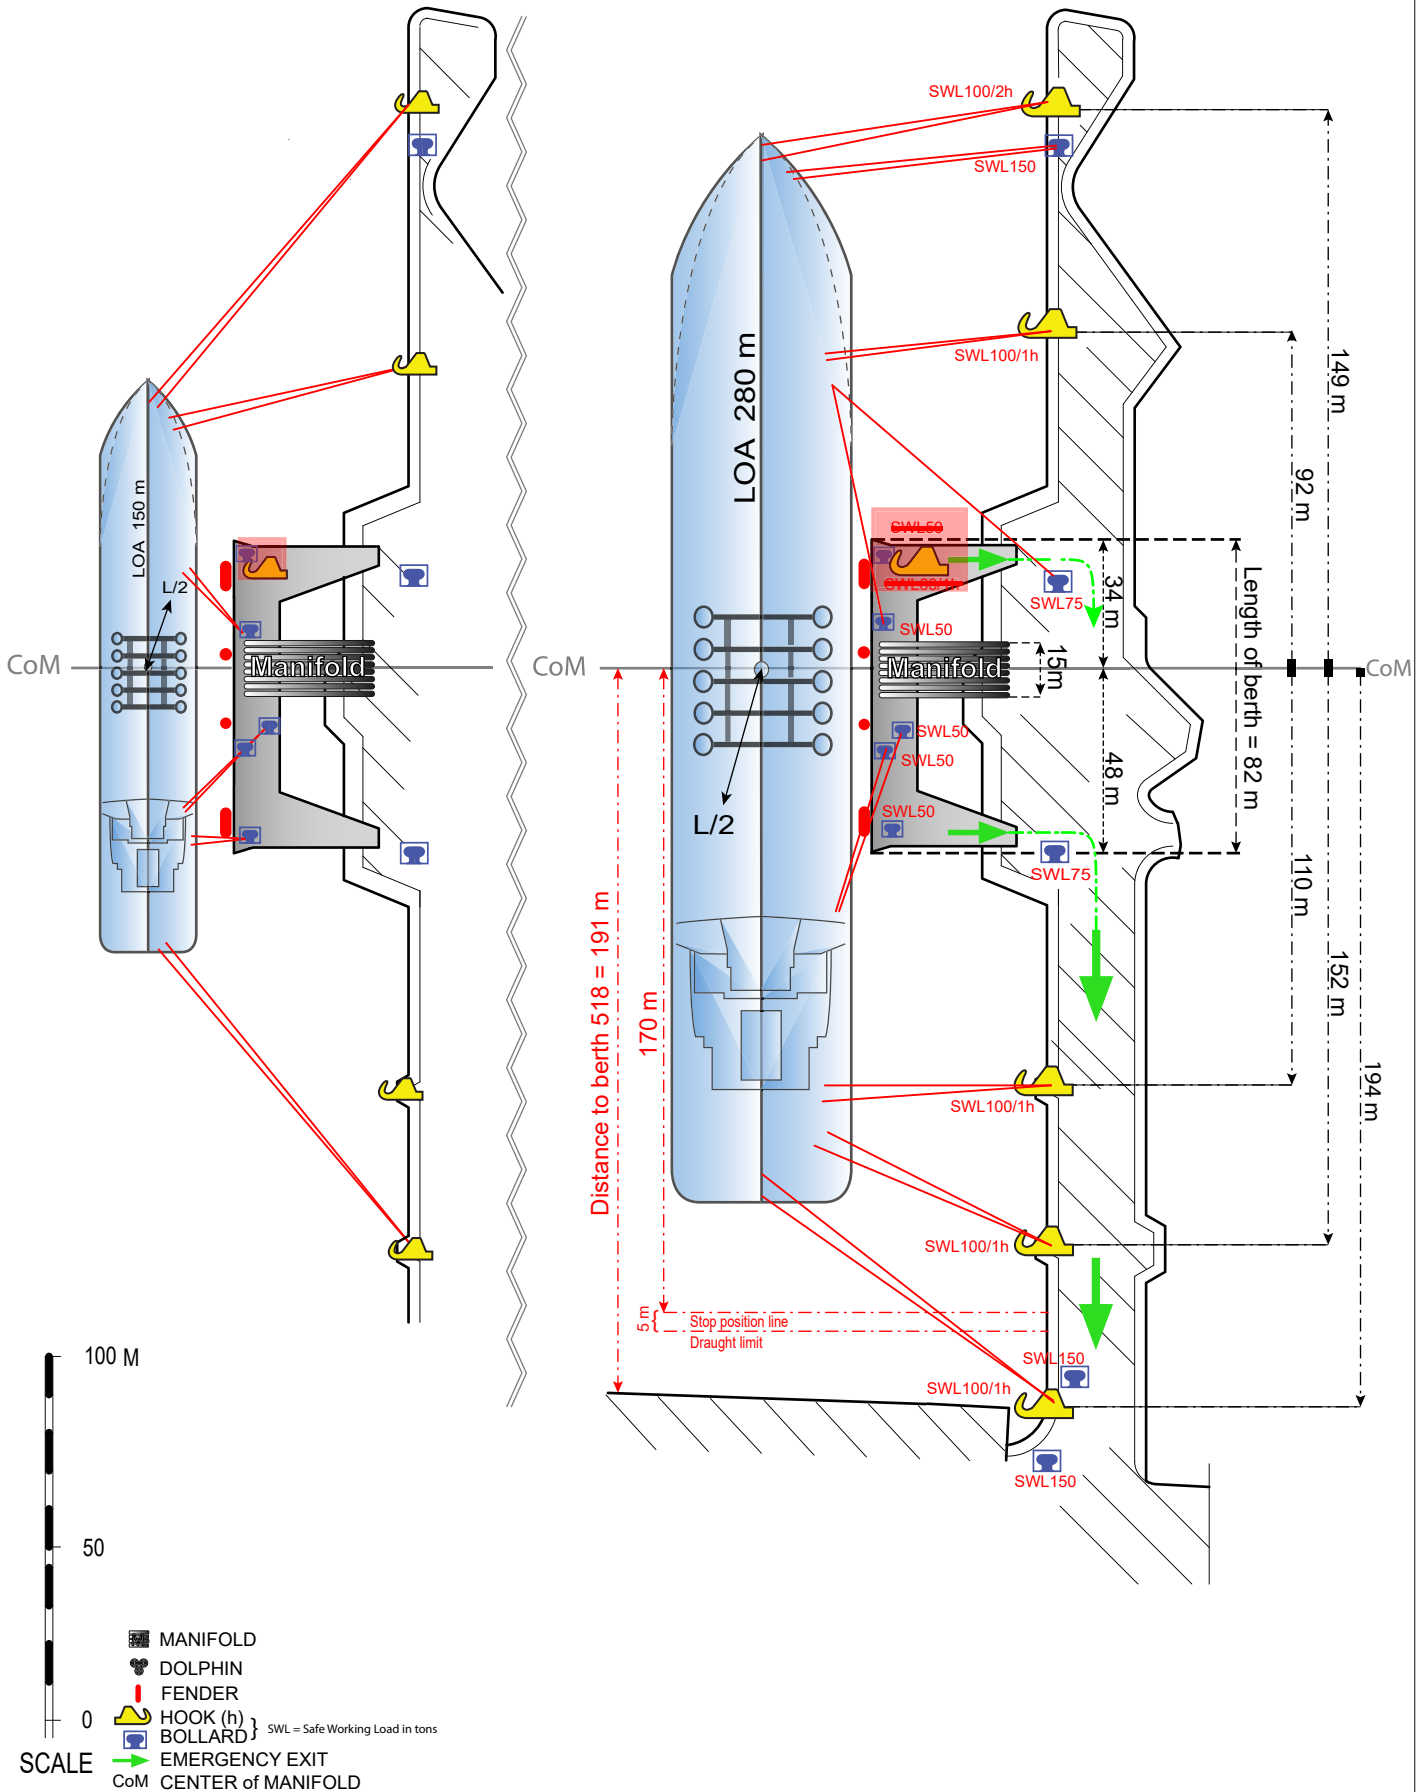


- MANIFOLD
 - DOLPHIN
 - FENDER
 - HOOK (h)
 - BOLLARD
 - EMERGENCY EXIT
 - CoM CENTER of MANIFOLD
- SWL = Safe Working Load in tons

SCALE

MOORING PLAN SKARVIK BERTH 519

	 N	BERTH DIRECTION 017° / 217°	REV. DATE / DATE	DRAWN	SCALE	BERTH / DRAWING NO	APPROVED BY
			2019-10-24	MAFLOBE		BERTH519	CL

HARD ARM No.	SIZE OF CONN.	PRODUCT	COMPANY	MAX PRESSURE BAR	MAX LOADING/DISCHARGING CAPACITY M3/H
--------------	---------------	---------	---------	------------------	---------------------------------------

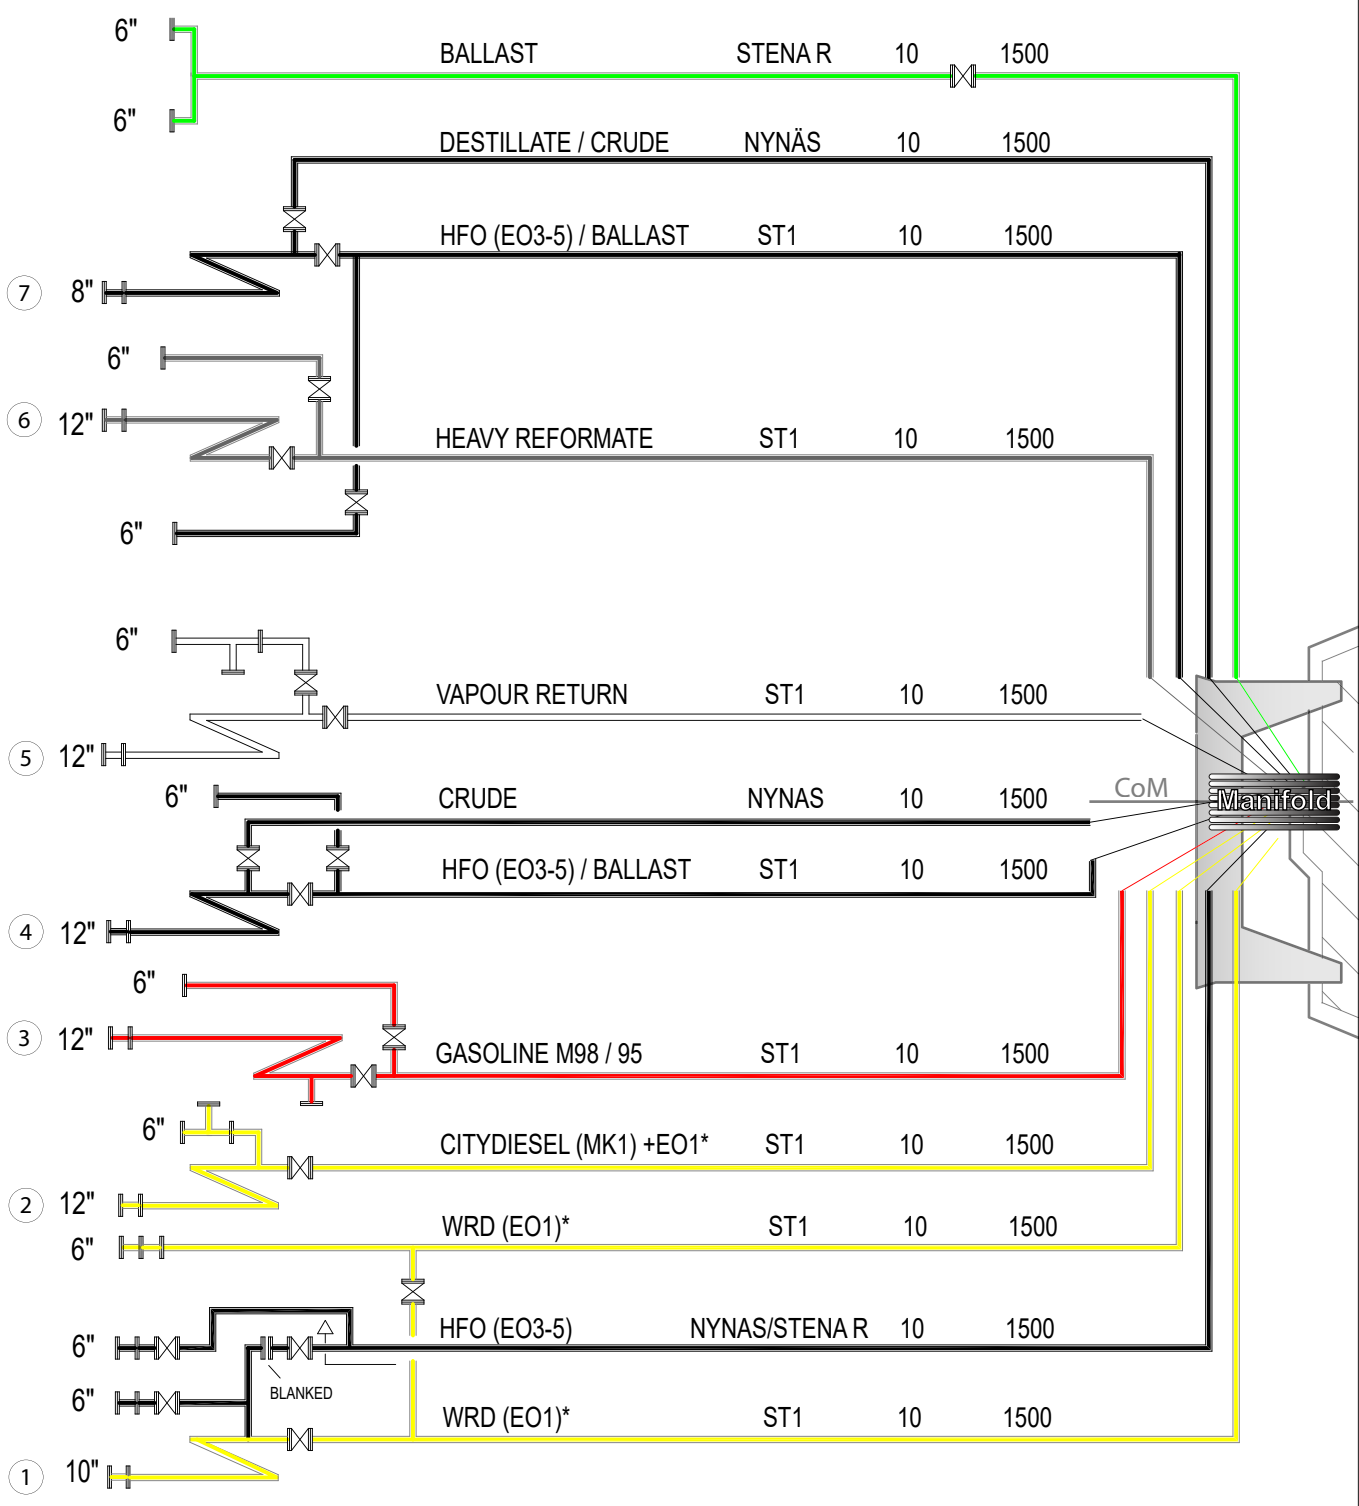

- ① = Hard arm No.
- = Hard arm symbol
- = Hose symbol

Hard arm connections \geq 8"
Hose connections \leq 6"

Bunkers available by barge
Fresh water available
Maximum 2 hoses to be used
per ship/shore connection