



BERTH 520

MAX DRAUGHT (MW):	11.5 M	MAX MANIFOLD HEIGHT ABV SEA LEVEL:	15 M
MAX LOA:	240 M	MAX VRU HEIGHT ABV SEA LEVEL:	13,7 M
MAX BREADTH:	N/A	QUAY DECK HEIGHT (MW):	3,7 M
UKC:	0.5 M	MAX DIST. STERN TO CoM:	N/A
MIN PARALLELL BODY:	26 M	MAX DISPLACEMENT:	N/A
MIN FREEBOARD (MW):	N/A	MAX SPEED:	N/A

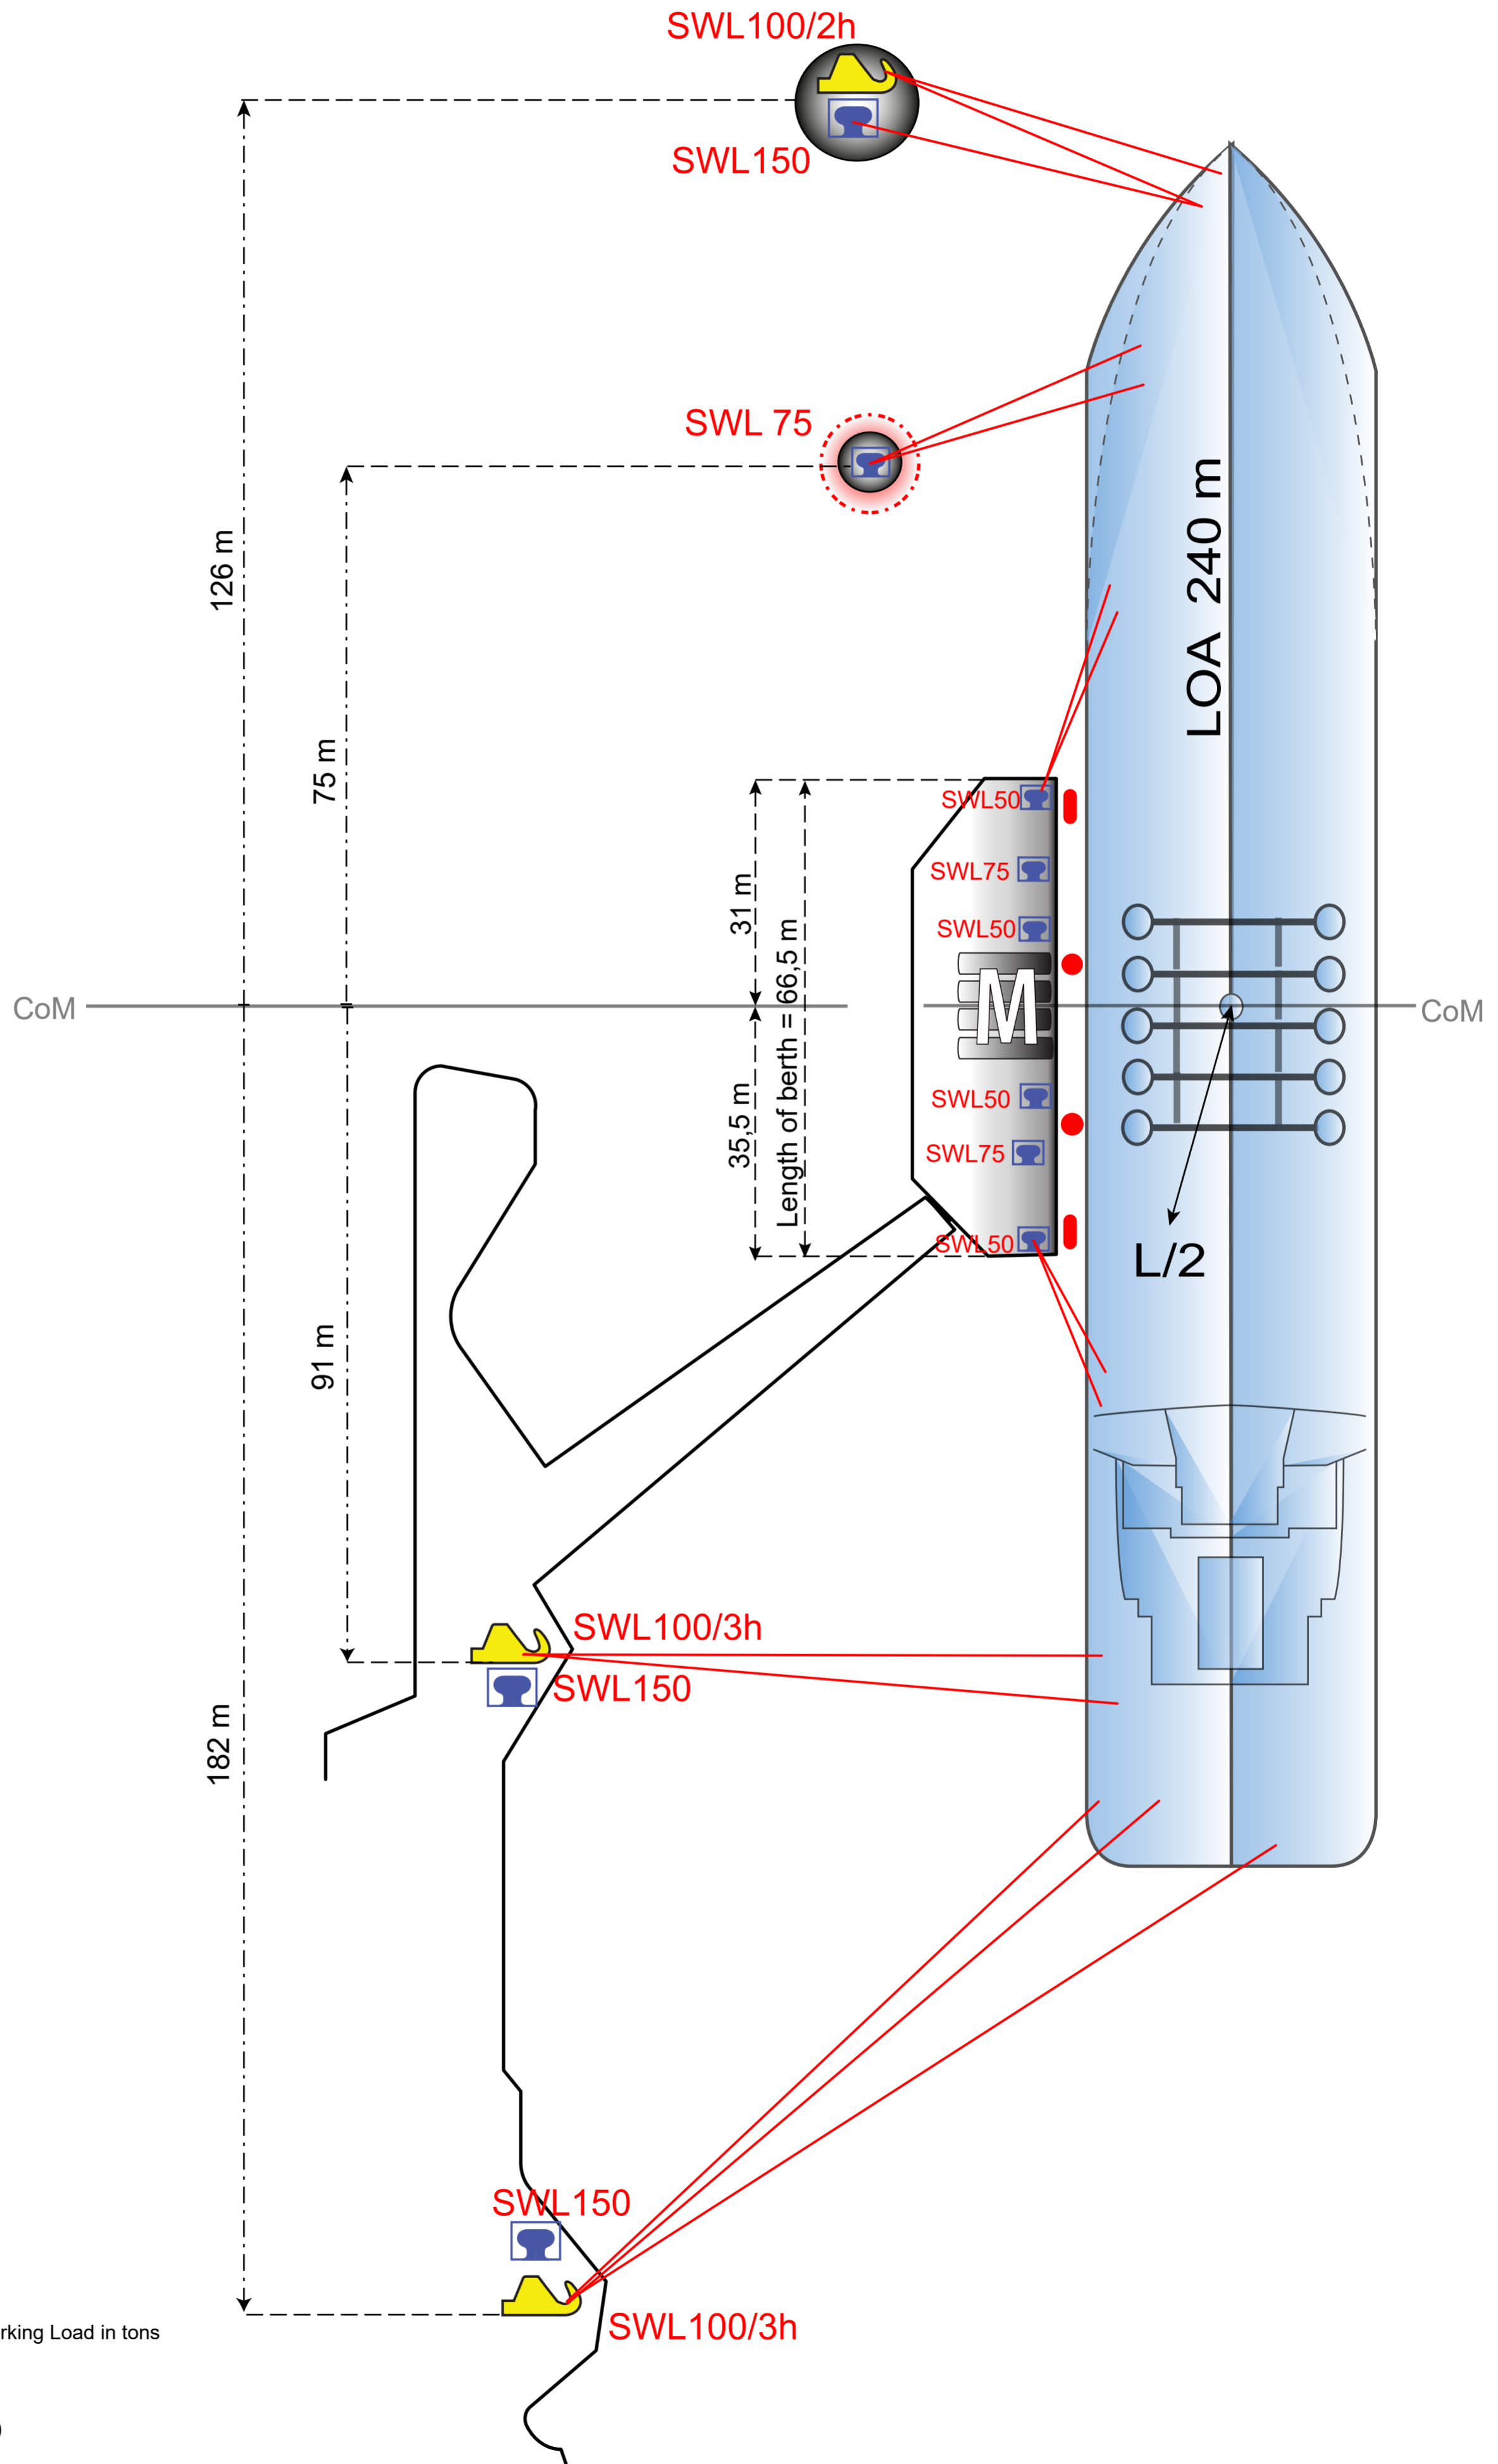


BERTH DIRECTION
017° / 197°

MOORING PLAN SKARVIK BERTH 520

REV. DATE / DATE 2017-09-21	DRAWN MAFLOBE	SCALE	BERTH / DRAWING NO BERTH520	APPROVED BY CL
--------------------------------	------------------	-------	--------------------------------	-------------------

PRODUCT	COMPANY	MAX PRESSURE BAR	MAX LOADING/DISCHARGING CAPACITY M3/H	HARD ARM Size	HARD ARM No.
---------	---------	------------------	---------------------------------------	---------------	--------------

VAPOUR RETURN

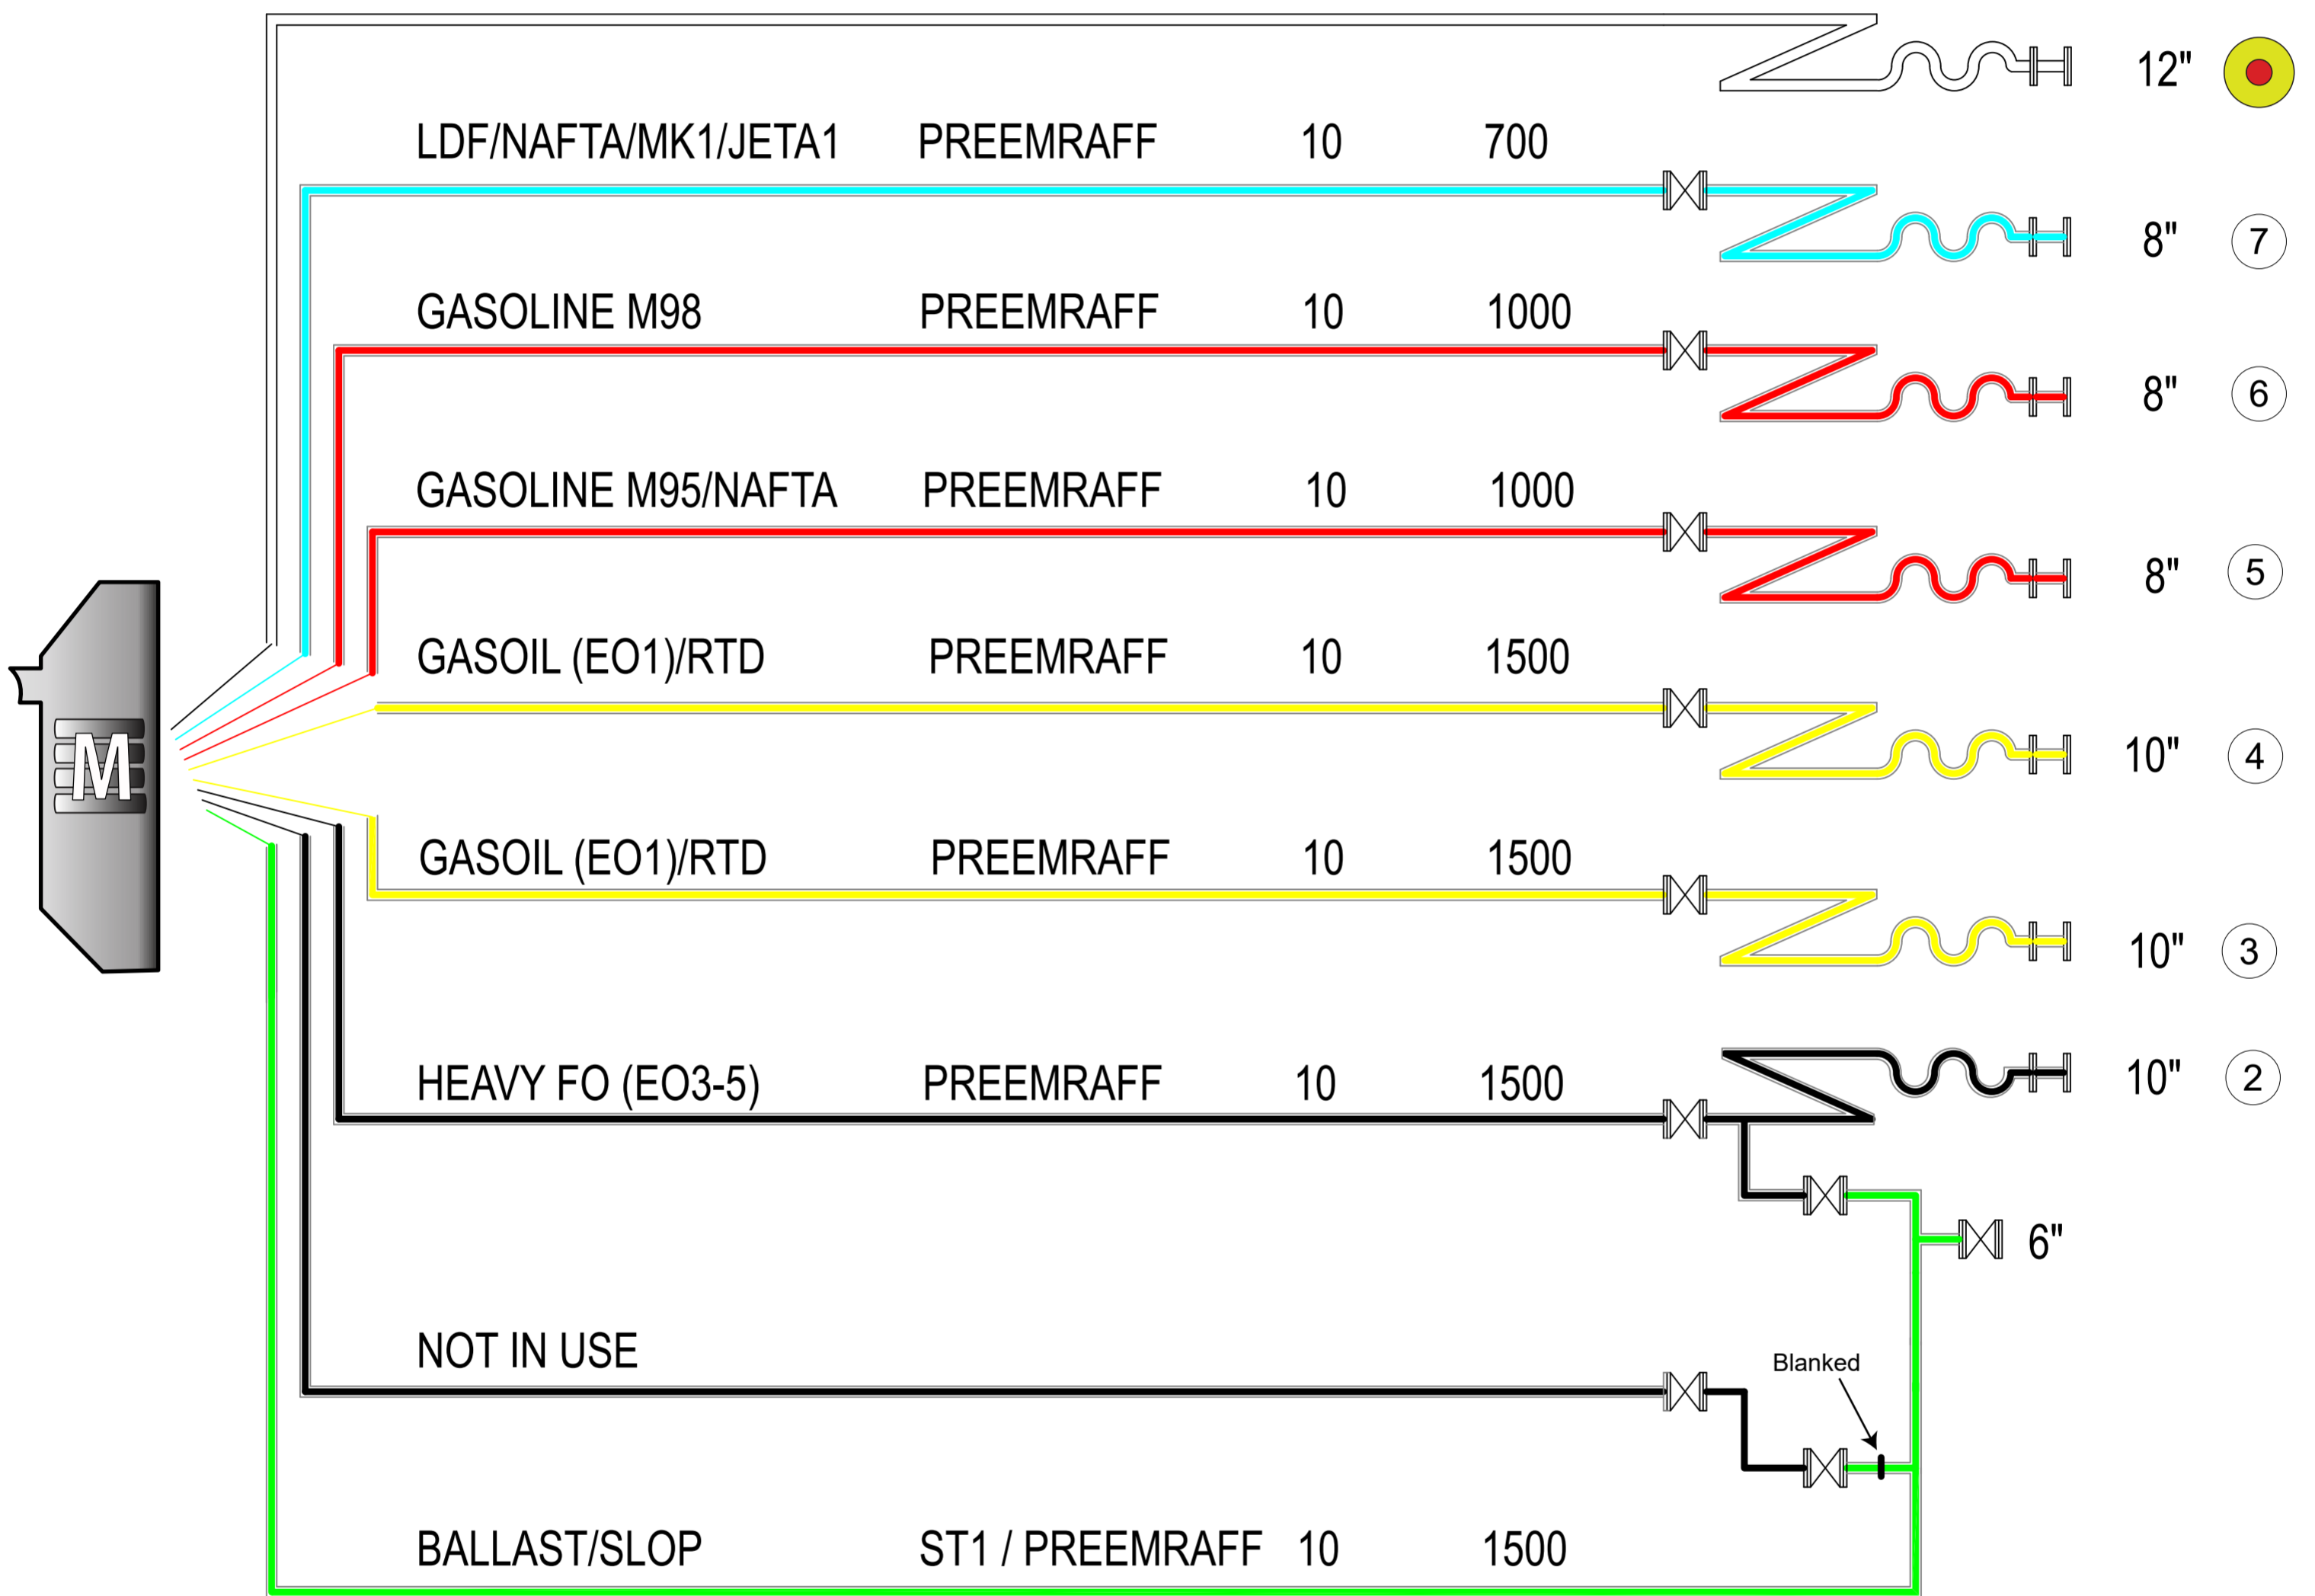

= Vapour Return



= Hard arm No.



= Hard arm symbol



= Hose symbol

Bunkers available by barge
 Fresh water available
 Maximum 2 hoses to be used
 per ship/shore connection



N

BERTH DIRECTION

017° / 197°

MANIFOLD ARRANGEMENT SKARVIK BERTH 520

REV. DATE /DATE

2022-10-15

DRAWN

MAFLOBE

SCALE





BERTH / DRAWING NO

BERTH520

APPROVED BY

CL

BERTH 520 SIDE VIEW

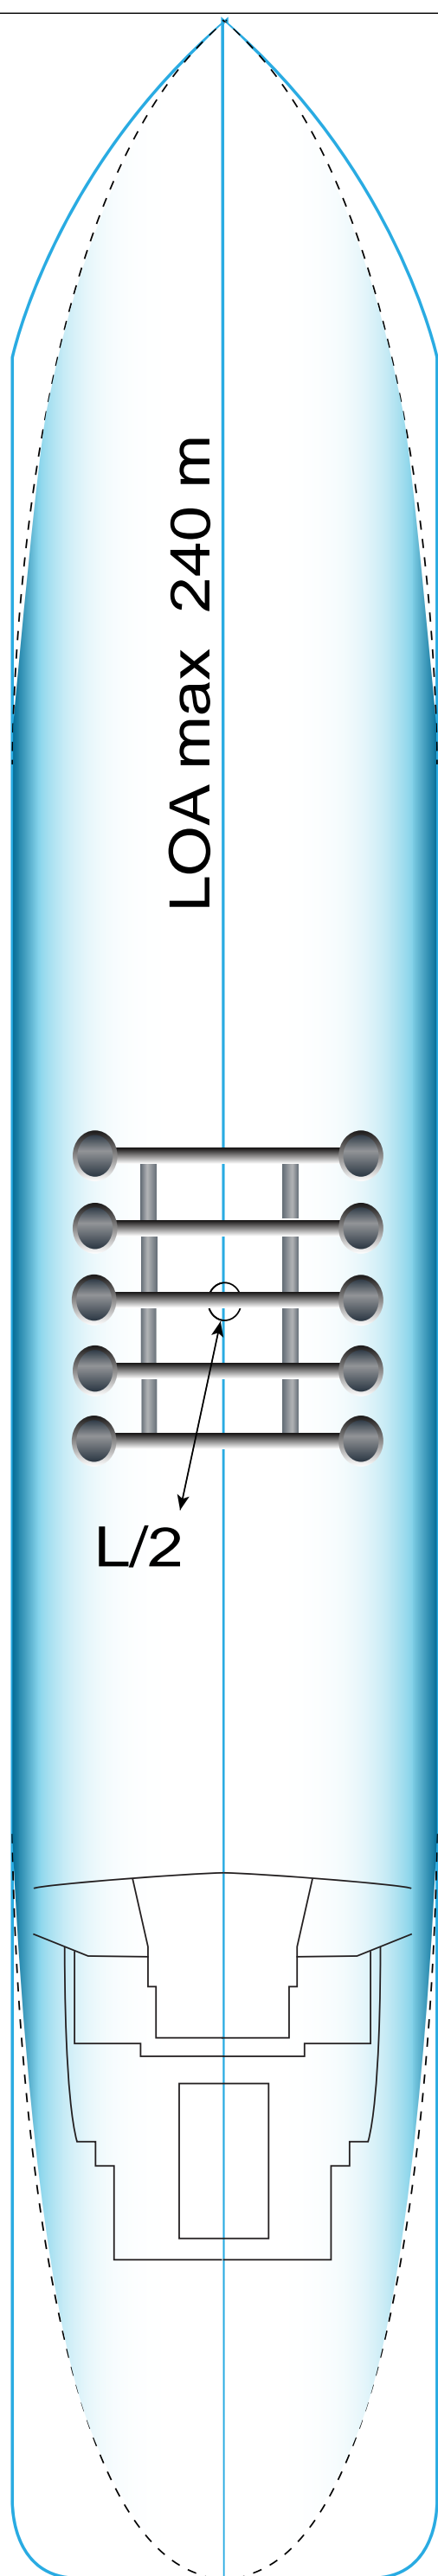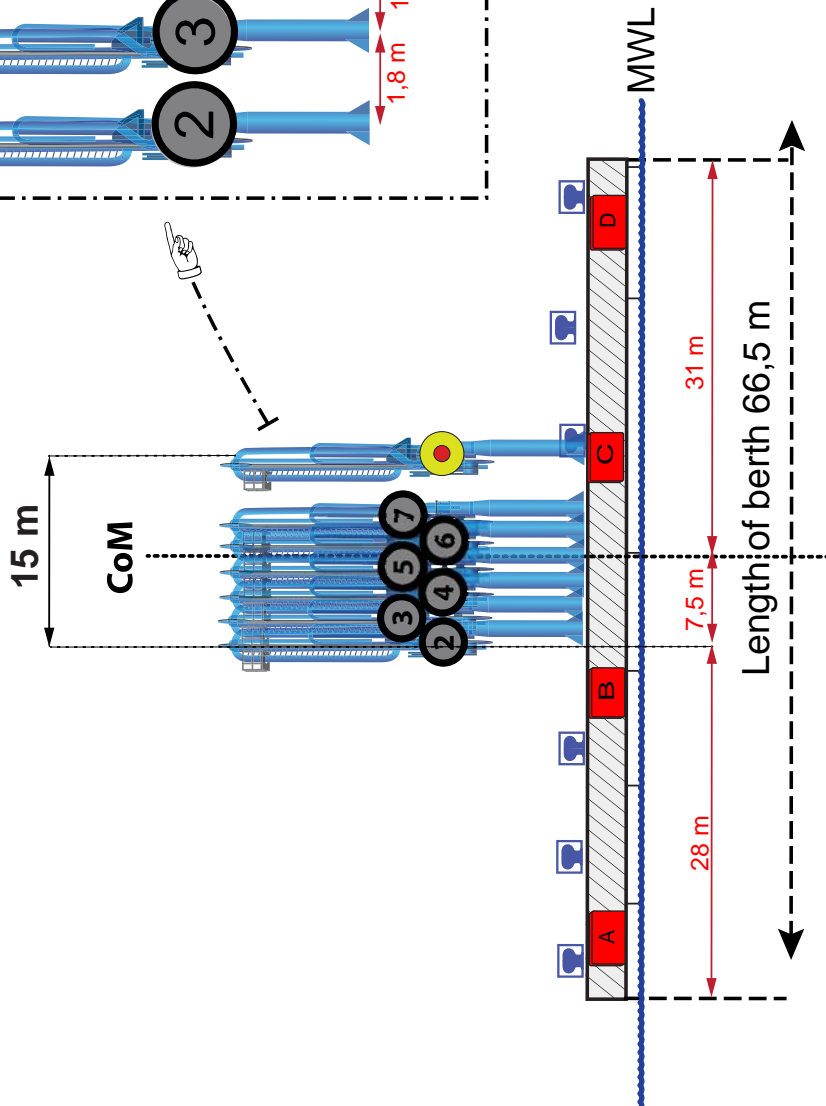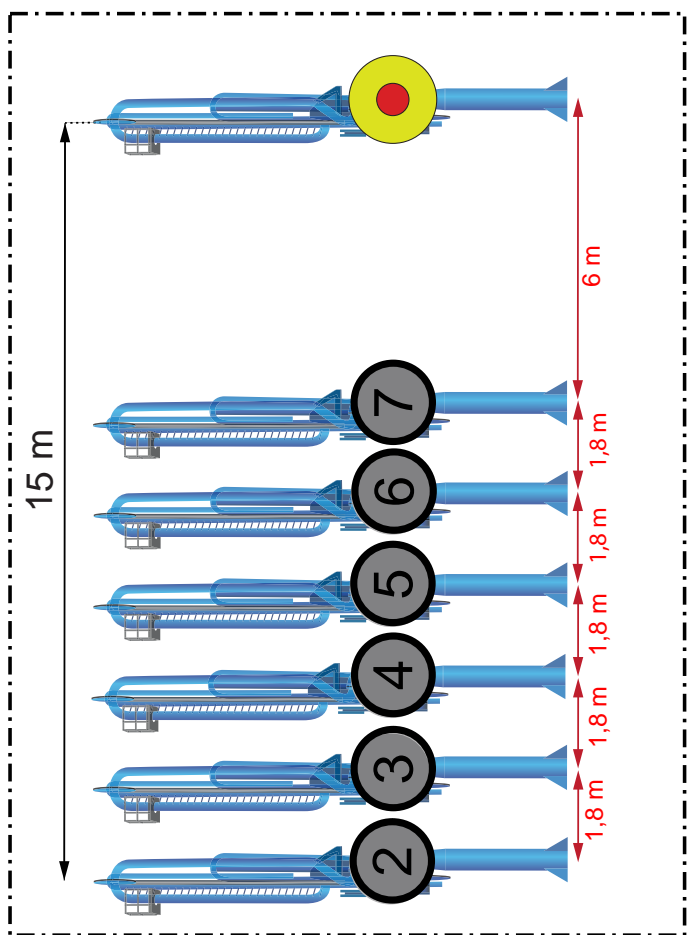

- Hard arm No.
- VRU Connection
- BOLLARD
- HOOK
- FENDER
- CoM** CENTRE of MANIFOLD

	 N	BERTH DIRECTION 017°/197°	BERTH 520 SKARVIKSHAMNEN SIDE VIEW			BERTH / DRAWING NO BERTH 520	APPROVED BY CH
		REV. DATE / DATE 2017-09-27	DRAWN MAFLOBE	SCALE 			