


BERTH 644

MAX DRAUGHT (MW):	7,6 M	MAX/MIN MANIFOLD HEIGHT	
MAX LOA:	135 M	ABOVE WATERLINE (MW):	11,5 M
MAX BREADTH:	N/A	QUAY DECK HEIGHT (MW):	2,07 M
UKC:	1,0 M	MAX BCM/SCM:	
MIN PARALLELL BODY:	30 M	MAX DISPLACEMENT:	
MIN FREEBOARD (MW):	N/A	MAX SPEED:	

Vessel clearance from the Energy Port, Port of Gothenburg, is needed for ships LOA ≥ 120 m.

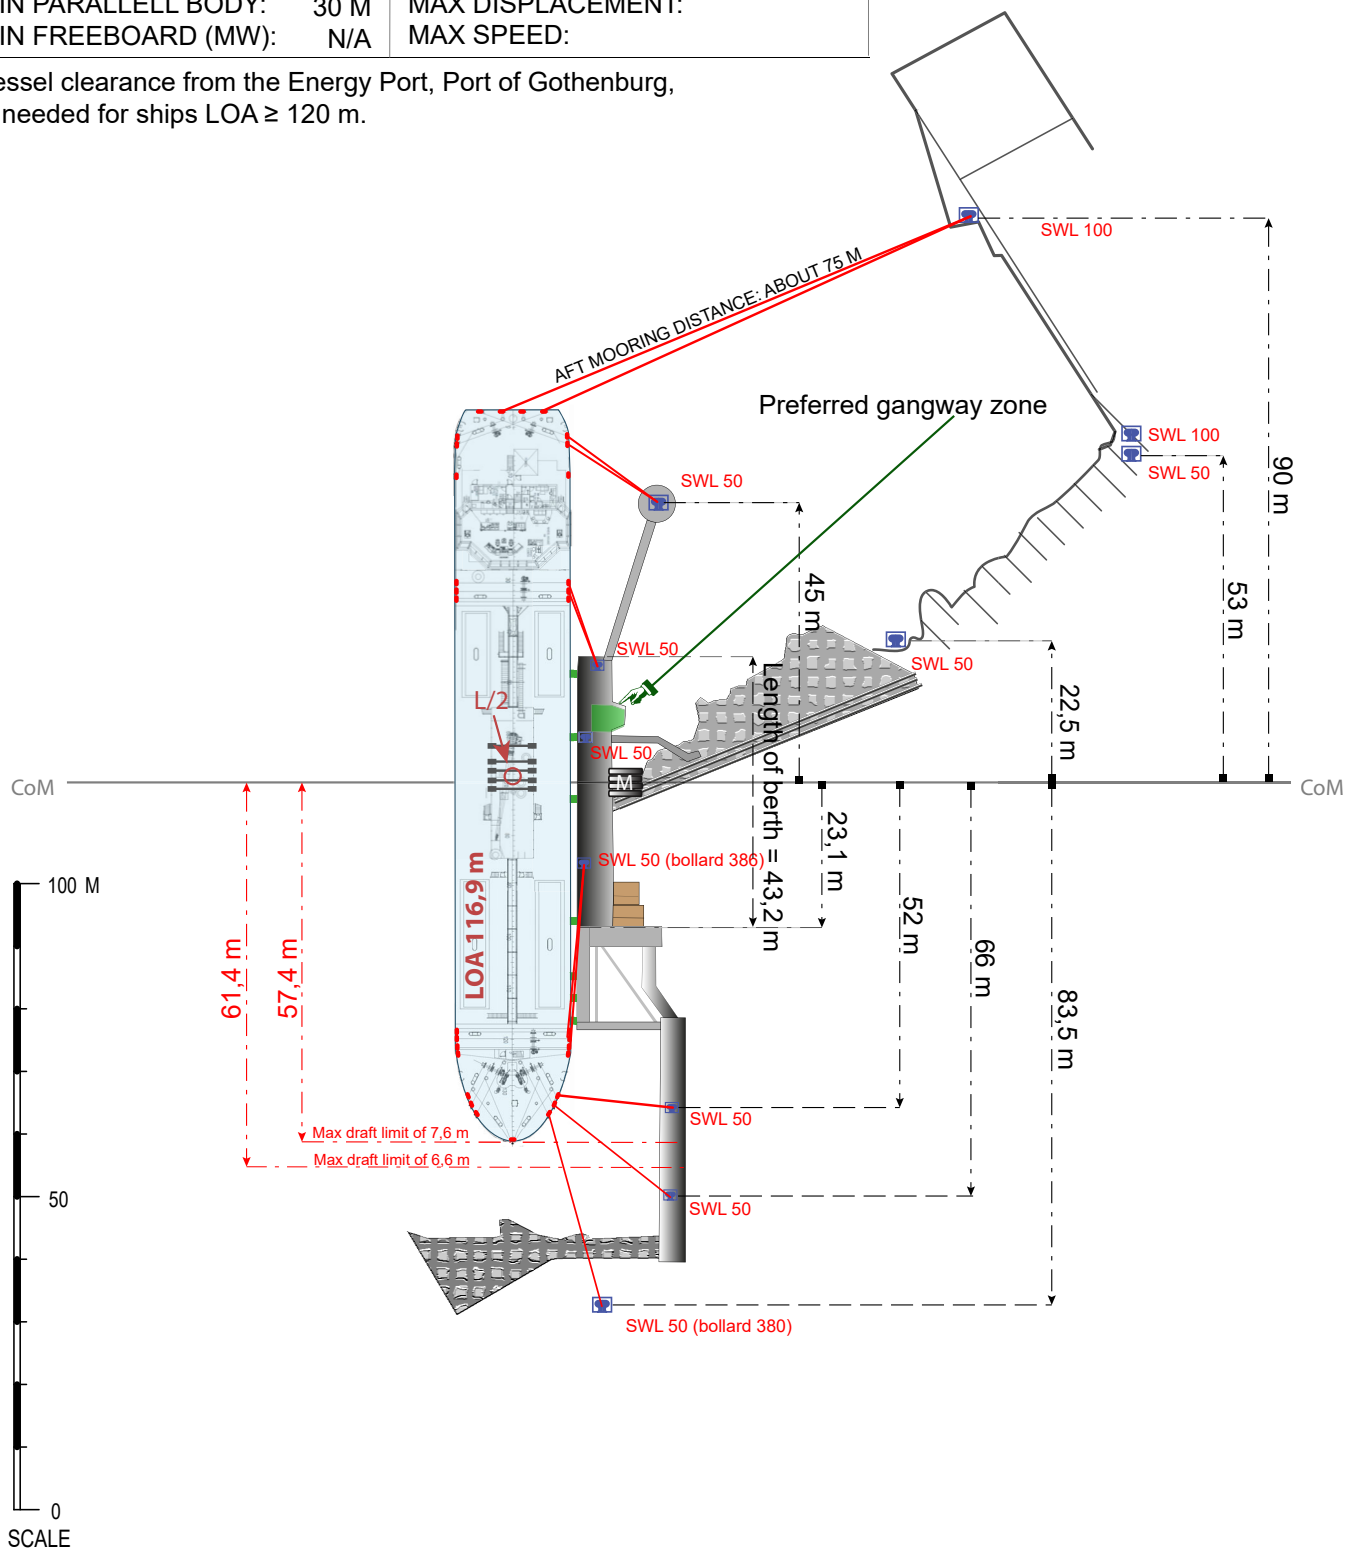

MANIFOLD

DOLPHIN

FENDER

HOOK

BOLLARD

EMERGENCY EXIT

CoM CENTER of MANIFOLD



BERTH
DIRECTION
029° / 209°

MOORING PLAN BERTH 644, LOA 117 m

REV. DATE
2026-08-07


DRAWN
MAFLOBE

SCALE

BERTH / DRAWING NO
BERTH 644 LOA 117

APPROVED BY
MM

HARD ARM No.	SIZE OF CONN.		PRODUCT	COMPANY	MAX PRESSURE BAR	MAX LOADING/DISCHARGING CAPACITY M3/H	
--------------------	---------------	--	---------	---------	---------------------	--	--

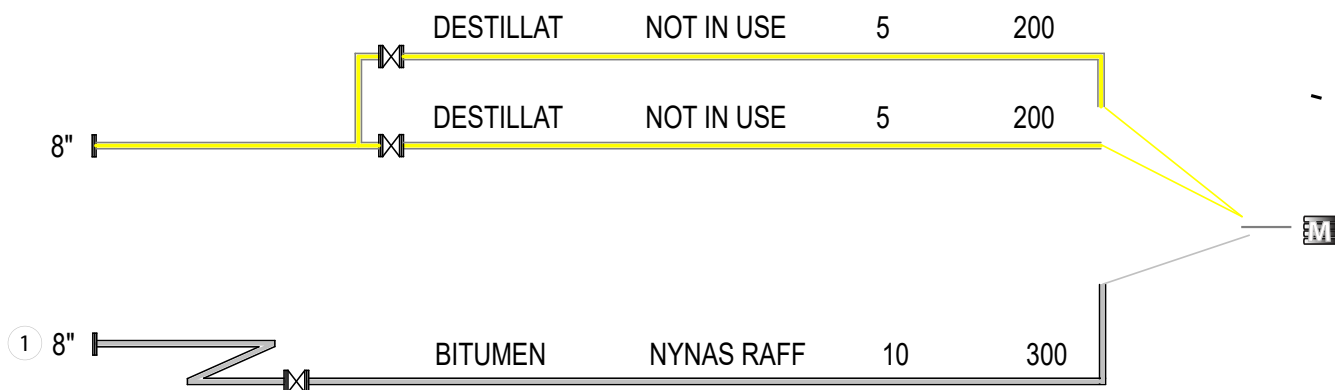

Connections: Hard arm and hose
 Bunkers available by barge
 Fresh water available

 N	BERTH DIRECTION 029° / 209°	MANIFOLD ARRANGEMENT BERTH 644				
		REV. DATE / DATE 2020-09-18	DRAWN MAFLOBE	SCALE 	BERTH / DRAWING NO BERTH 644	APPROVED BY CL